

2N



2N Indoor View

Indoor station with a 7" touch display

The 2N Indoor View unit looks at home in even the most luxurious of penthouse apartments! It's advanced too - it offers widescreen HD video calls, can integrate with smart home systems, and supports video surveillance. Install it inside the wall, on the wall, or on a stand.

7" HD TOUCHSCREEN

Your customer will appreciate how easy it is to operate the unit on the large display. The home screen even provides the current weather forecast.

STYLISH DESIGN

A luxury penthouse deserves a great looking unit. Offer the 2N Indoor View to ensure you win your project.

VIDEO SURVEILLANCE

The resident can see what is going on in places where no intercom has been installed, and there is only an IP camera (e.g., a hallway, yard or garage).

FULL SCREEN VIDEO CALLS

We've enlarged the video call preview. This means residents can even read a courier's name tag with ease. Wide screen calls will be compatible only with some 2N intercoms.

FIRST CONFIGURATION FROM YOUR OFFICE

Save time and money. You can set up all the units in a project remotely without the need to travel to the installation site.

RESIDENTS' PRIVACY IN SAFE HANDS

The 2N Indoor View runs on our very own operating system. We've made sure that no one can listen in or record residents' conversations.


SMART HOME INTEGRATION

The resident can turn on the air-conditioning, lighting or call the lift directly from the display on their unit. The unit can send up to 3 different HTTP commands.


GREAT FOR RETROFIT PROJECTS

In addition to the classic Ethernet version, we also offer a Wi-Fi variant which is great for adding all these advanced features to places without network cabling.


Variants

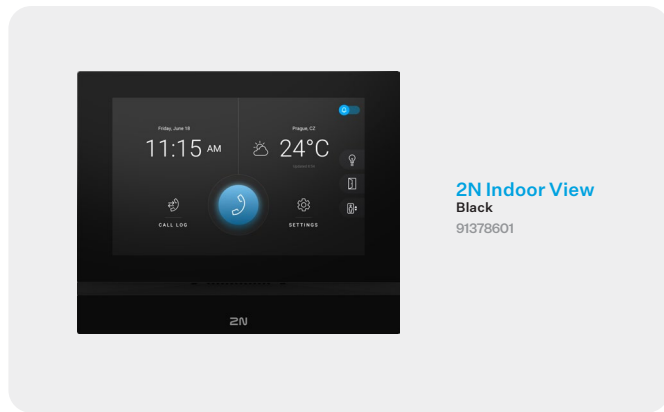

**2N Indoor View
Black**
91378601

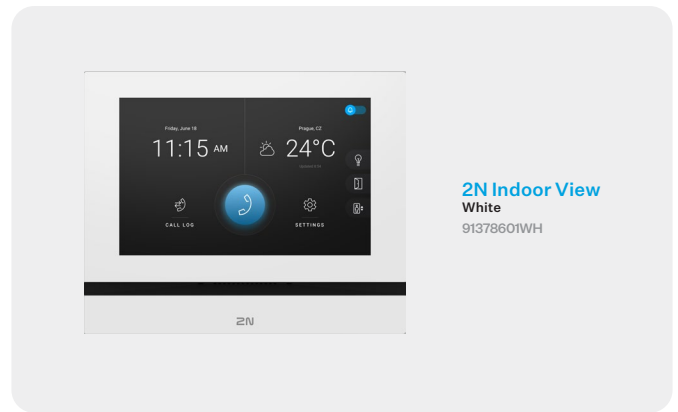

**2N Indoor View
White**
91378601WH

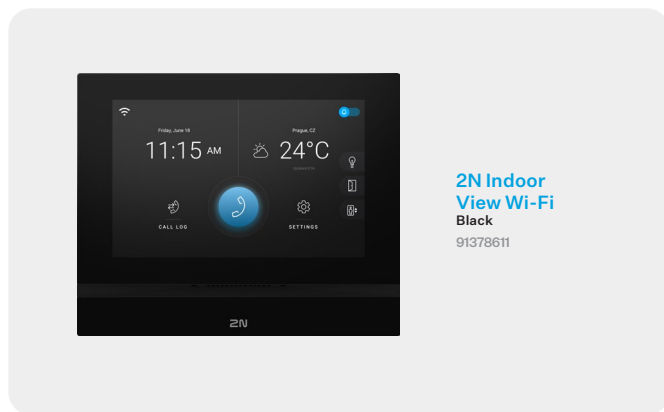

**2N Indoor
View Wi-Fi
Black**
91378611



**2N Indoor
View Wi-Fi
White**
91378611WH

Technical Parameters

Power Supply

Type	12V DC adapter or PoE 802.3af
Recommended power supply	12V/1A
Reverse polarity protection	yes

User Interface

Controls	capacitive touch panel
Display size	7"
Resolution	1024x600px

Audio

Microphone	integrated
Speaker	integrated, 2W
Induction loop output	600mV RMS
Codecs	G.711a/u, G.722, G.729, L16/16 kHz

Video

Codecs	H.264
--------	-------

Interface

LAN	10/100BaseT, RJ-45
Recommended cabling	Cat5e or higher

Wi-Fi (optional)

Frequency	2.4GHz and 5GHz
Standard	802.11n and 802.11ac
Antenna	in-built
Important	Wi-Fi and ethernet cannot be used simultaneously

Doorbell Input

Input type	switching contact (button/relay)
Contact type	normally open (NO)
Contact parameters	up to 50V/5mA, DC

Mechanical Parameters

Dimensions (W x H x D)	193x157x50mm
Weight	555g
Operating temperature	0 to 50°C
Relative operating humidity	10 to 90% (non-condensing)
Storage temperature	-20 to 70°C
Recommended altitude	0 to 2000m

Warranty

5-years warranty see https://www.2n.com/en_GB/support/warranty-and-repairs

2N TELEKOMUNIKACE a.s.

Prague, Czech Republic | +420 261 301 500 | sales@2n.com

2N.com