


Description: DALI Lighting Cable Low Smoke Non-Halogen (LSNH) insulation, Low Smoke Non-Halogen (LSNH) White Sheath



Product Construction

Conductor Material	:	Bare Copper
Conductor Stranding	:	Class 5 to IEC / BS EN 60228
Insulation Material	:	Low Smoke Non-Halogen (LSNH), Type T16
Core Colours	:	5core Brown, Blue, Green/Yellow, Red & White
	:	6core Brown, Blue, Green/Yellow, Red, White & Black
Sheath Material	:	Low Smoke Non-Halogen (LSNH), Type TM7
Sheath Colour	:	White

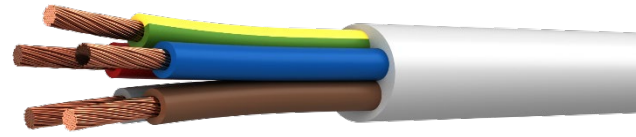

Mechanical Characteristics

Overall Diameter	:	See Table Below
Temperature Range	Flexing	-5°C to +70°C
Bend Radius	:	6 x Overall Diameter
Weight	:	See Table Below

Electrical Characteristics

Conductor DC Resistance @ 20°C	:	to BS EN 60228
Voltage Rating	:	300/500V

Certifications & Standards

Manufactured to	:	EN 50525-3-11
Flame Retardancy	:	BS EN 60332-1-2
Low Smoke	:	BS EN 61034-2
Halogen Gas	:	BS EN 50525-1, BS EN 50267
RoHS 3 Compliant	:	Yes
REACH Compliant	:	Yes
CE CPR Classification	:	Cca s2, d2, a1 to EN 50575:2014+A1:2016
UKCA CPR Classification	:	Cca s2, d2, a1 to BS EN 50575:2014+A1:2016

Part No.	Cores x mm ²	Weight kg/km	OD mm
320225C-WHT-DL	5 x 1.0	122	8.8
320235C-WHT-DL	5 x 1.5	175	10.4
320226C-WHT-DL	6 x 1.0	144	9.5
320236C-WHT-DL	6 x 1.5	206	11.4