

Request to Exit Button Range




RETRACTABLE SWITCH

Technical specifications

- Contacts : Changeover contacts.
- Output : 10 AMP contact @ 240 V AC/DC.
- Printed pad legend.
- Fixing screws supplied.
- Internal use only.

Approval : EN 50133 Industrial Codes of Practice

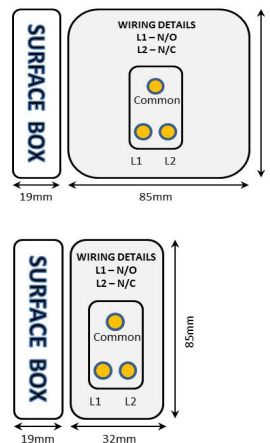

FEATURES

- Retractable switch.
- High impact plastic back box.
- Can be surface or flush fitting.
- Easy clean surface. Ideal for general/sensitive areas.
- Screw footprint for flush fitting onto standard back box.

EBLS/PTE	85x85x28 (mm)	Standard retractable switch	PRESS TO EXIT	140g (Boxed) / 120g (Unboxed)
EBLS/DR	85x85x28 (mm)	Standard retractable switch	DOOR RELEASE	140g (Boxed) / 120g (Unboxed)
EBLS/AP/PTE	85x39x28 (mm)	Architrave retractable switch	PRESS TO EXIT	80g (Boxed) / 70g (Unboxed)
EBLS/AP/DR	85x39x28 (mm)	Architrave retractable switch	DOOR RELEASE	80g (Boxed) / 70g (Unboxed)

Other items in the RGL range.

