

IndoorCam

Indoor Wi-Fi security camera with PIR motion detector and built-in AI

Professional security and Al. Domesticated.

IndoorCam is an indoor video device that combines the usability of a Wi-Fi camera with high-end security features. Equipped with a PIR sensor and a wide-angle HDR camera powered by AI, the device detects people, animals, and vehicles and delivers excellent image quality. With a secure fallback communication channel, IndoorCam remains operational even if the Wi-Fi connection is lost. The camera upholds Ajax's signature privacy controls, ensuring that user data remains protected at all times.








Three operation options



Easily accessible real-time video streaming thanks to the JetSparrow technology



Video streaming with a secure private archive





Al-powered object recognition and smart video recording with short clips stored in the cloud archive¹

Reliable connection at all times

IndoorCam uses Wi-Fi as its primary communication channel. The device is designed to amplify the signal and reduce radio interference, which ensures a more stable connection over greater distances.

When connected to an Ajax hub through the secure proprietary Jeweller and Wings radio protocols, IndoorCam has access to a fallback communication channel. This enables the camera to transmit events, alarms, and photos even if the Wi-Fi connection is lost.

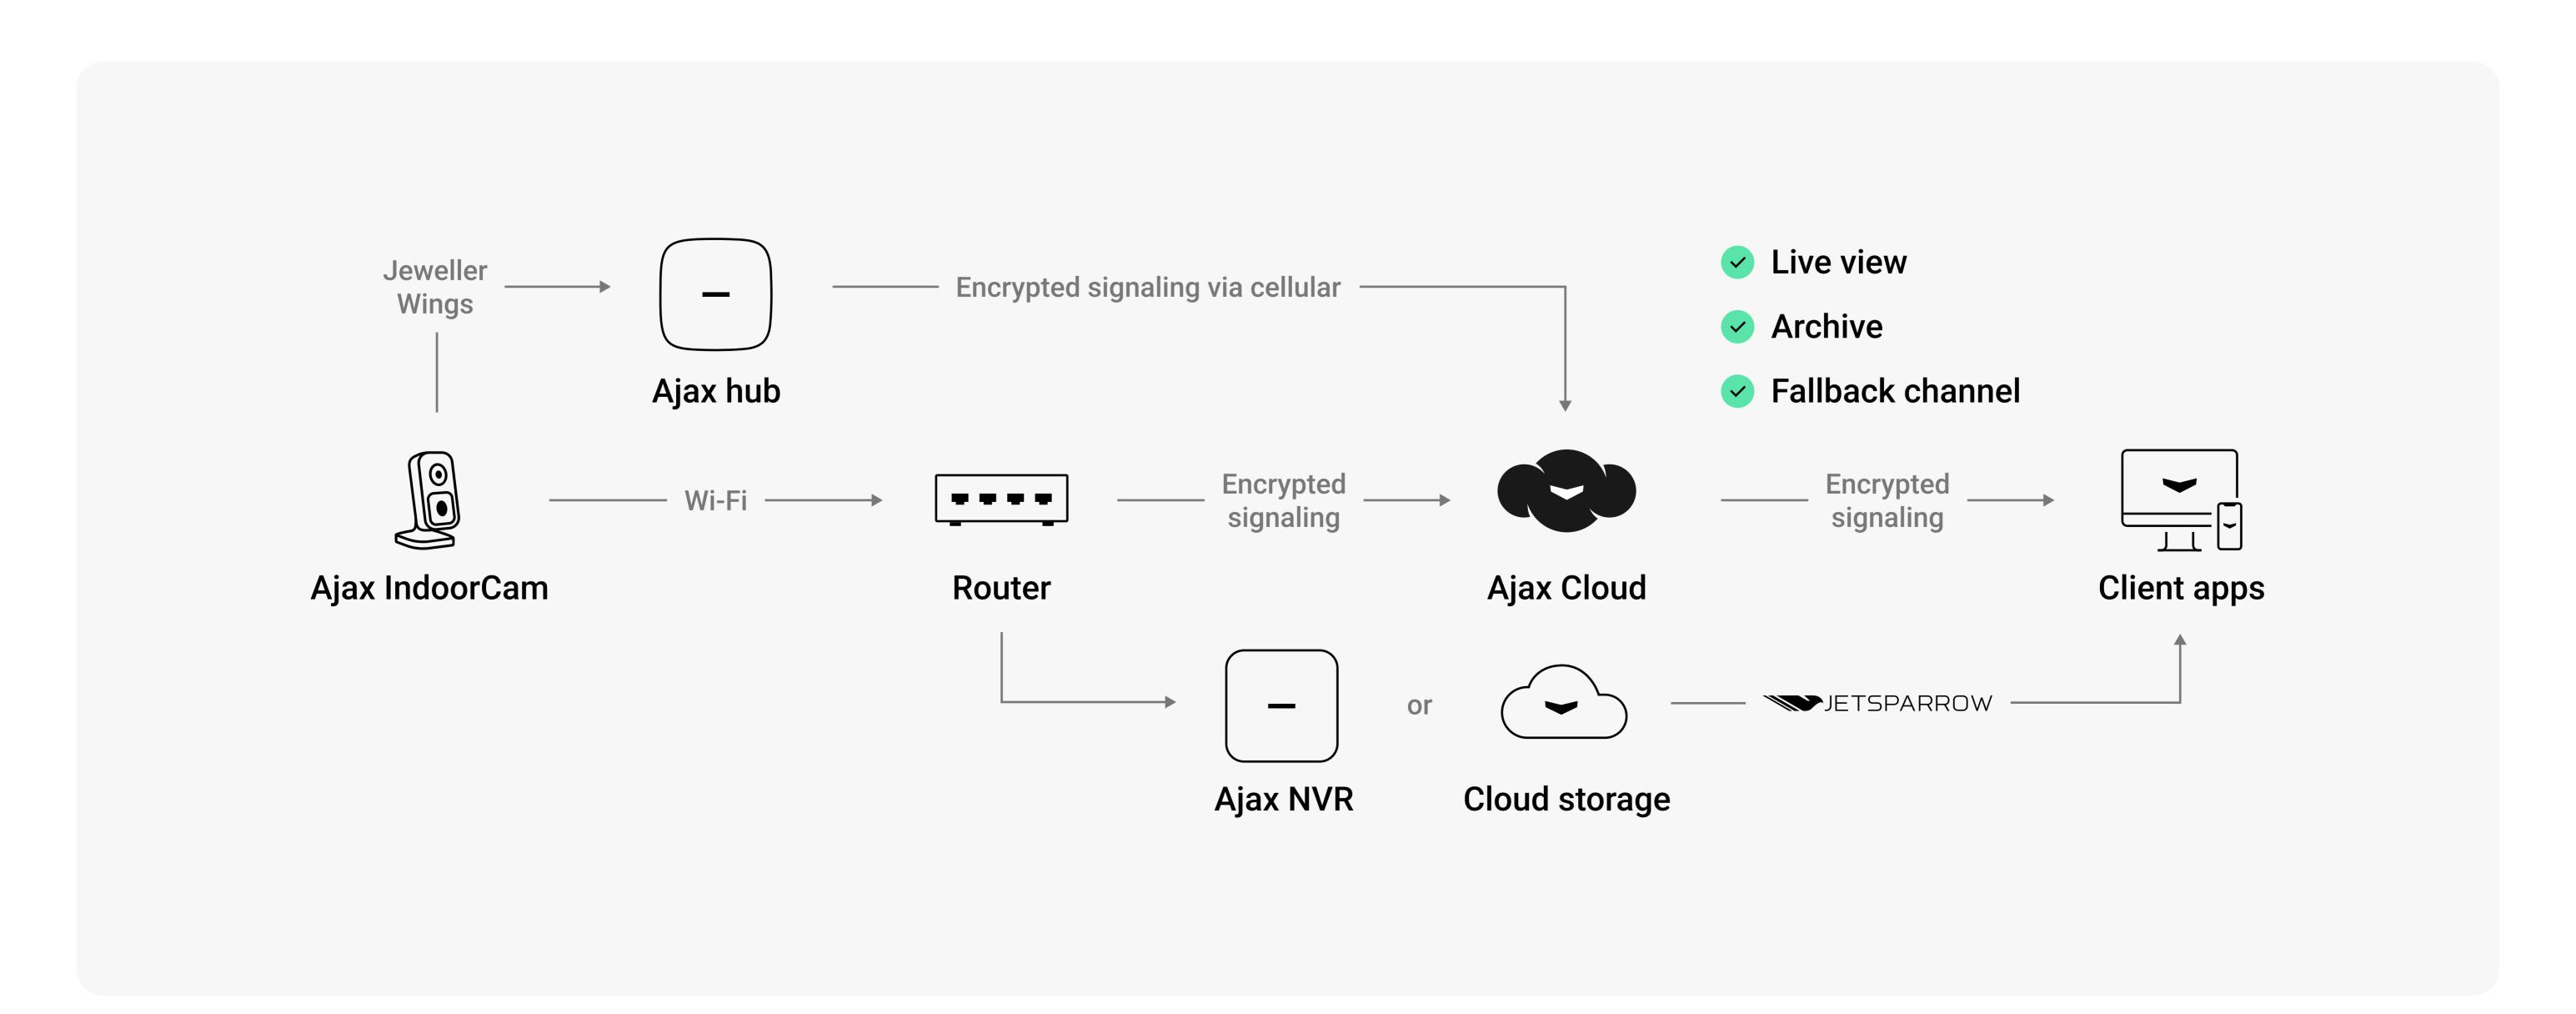




Advanced video experience

- Al-powered recognition of people, animals, and vehicles
- Smooth streaming and archive navigation thanks to the JetSparrow technology
- High-quality images with a wide-angle HDR camera
- IR illumination of up to 8 m (26 ft) for enhanced visibility in the dark



Uncompromised security

- Fallback wireless communication with a hub at a distance² of up to 1,700 m (5,550 ft)
- Secure passwordless authentication
- Customizable access rights for each user



Quality two-way audio

- Clear voice transmission with noise suppression
- Echo cancellation for better audibility
- Top-notch audio quality thanks to the G.722 codec



Easy installation and setup

- Pairing with the hub by scanning the QR code
- Remote control and configuration via Ajax apps
- Articulating bracket for easy installation without disassembling the device enclosure

Compatibility	Communication	Sound	Features
Hubs	Jeweller and Wings radio	Output speaker power	Two-way communication
Hub 2 (2G) Jeweller	communication technologies	1.5 W	
Hub 2 (4G) Jeweller			PIR motion detection
Hub 2 Plus Jeweller	Communication range	Speaker volume	up to 4 m
Hub BP Jeweller	up to 1,700 m	85 dB	up to 13 ft
Hub Hybrid (2G)	up to 5,550 ft		Using a PIR sensor
Hub Hybrid (4G)	In an open space	Power supply	
Hub BP Jeweller			Built-in Al
	Frequency bands	Main DC voltage range	Recognizing people, animals,
Range extenders	866.0-866.5 MHz	12 V==	and vehicles
ReX 2	868.0-868.6 MHz		
	868.7-869.2 MHz		Smart IR illumination
/ideo recorders	905.0-926.5 MHz		up to 8 m
NVR (8-ch)	915.85-926.5 MHz		up to 26 ft
NVR (16-ch)	921.0-922.0 MHz		Automatic real-time adjustment
	Depends on the sales region		
/ideo recording			Audio processing
	Wi-Fi		Always active noise suppression
Camera	2.4GHz, up to 3 Mb/s		and echo cancellation
MP CMOS sensor			
Resolution	Enclosure	Installation	Complete set
ıp to 2688 × 1520 px			
	Color	Operating temperature range	IndoorCam
Camera viewing angles	black, white	from 0 °C to +40 °C	Power supply unit
norizontal: 110°		from 32 °F to 104 °F	Installation kit
vertical: 60°	Dimensions		
	TBC	Operating humidity	Quick start guide
/ideo protocol		TBC	
JetSparrow	Weight		
-	235 g	Protection class	
/ideo codec	8.3 oz	IP20	
H.264			

Dynamic range

HDR

¹ This feature will be available in upcoming updates.

² In an open space.