



Superior product line

Ajax SpaceControl S Jeweller

Wireless key fob with a panic button and control for security modes. Superior edition




2
GRADE
EN 50131

PD 6662
2017


NFA2P

SIA
CP-01

Ajax SpaceControl S Jeweller has a silicon overlay over the light indicators. This upgrade provides improved protection against humidity.

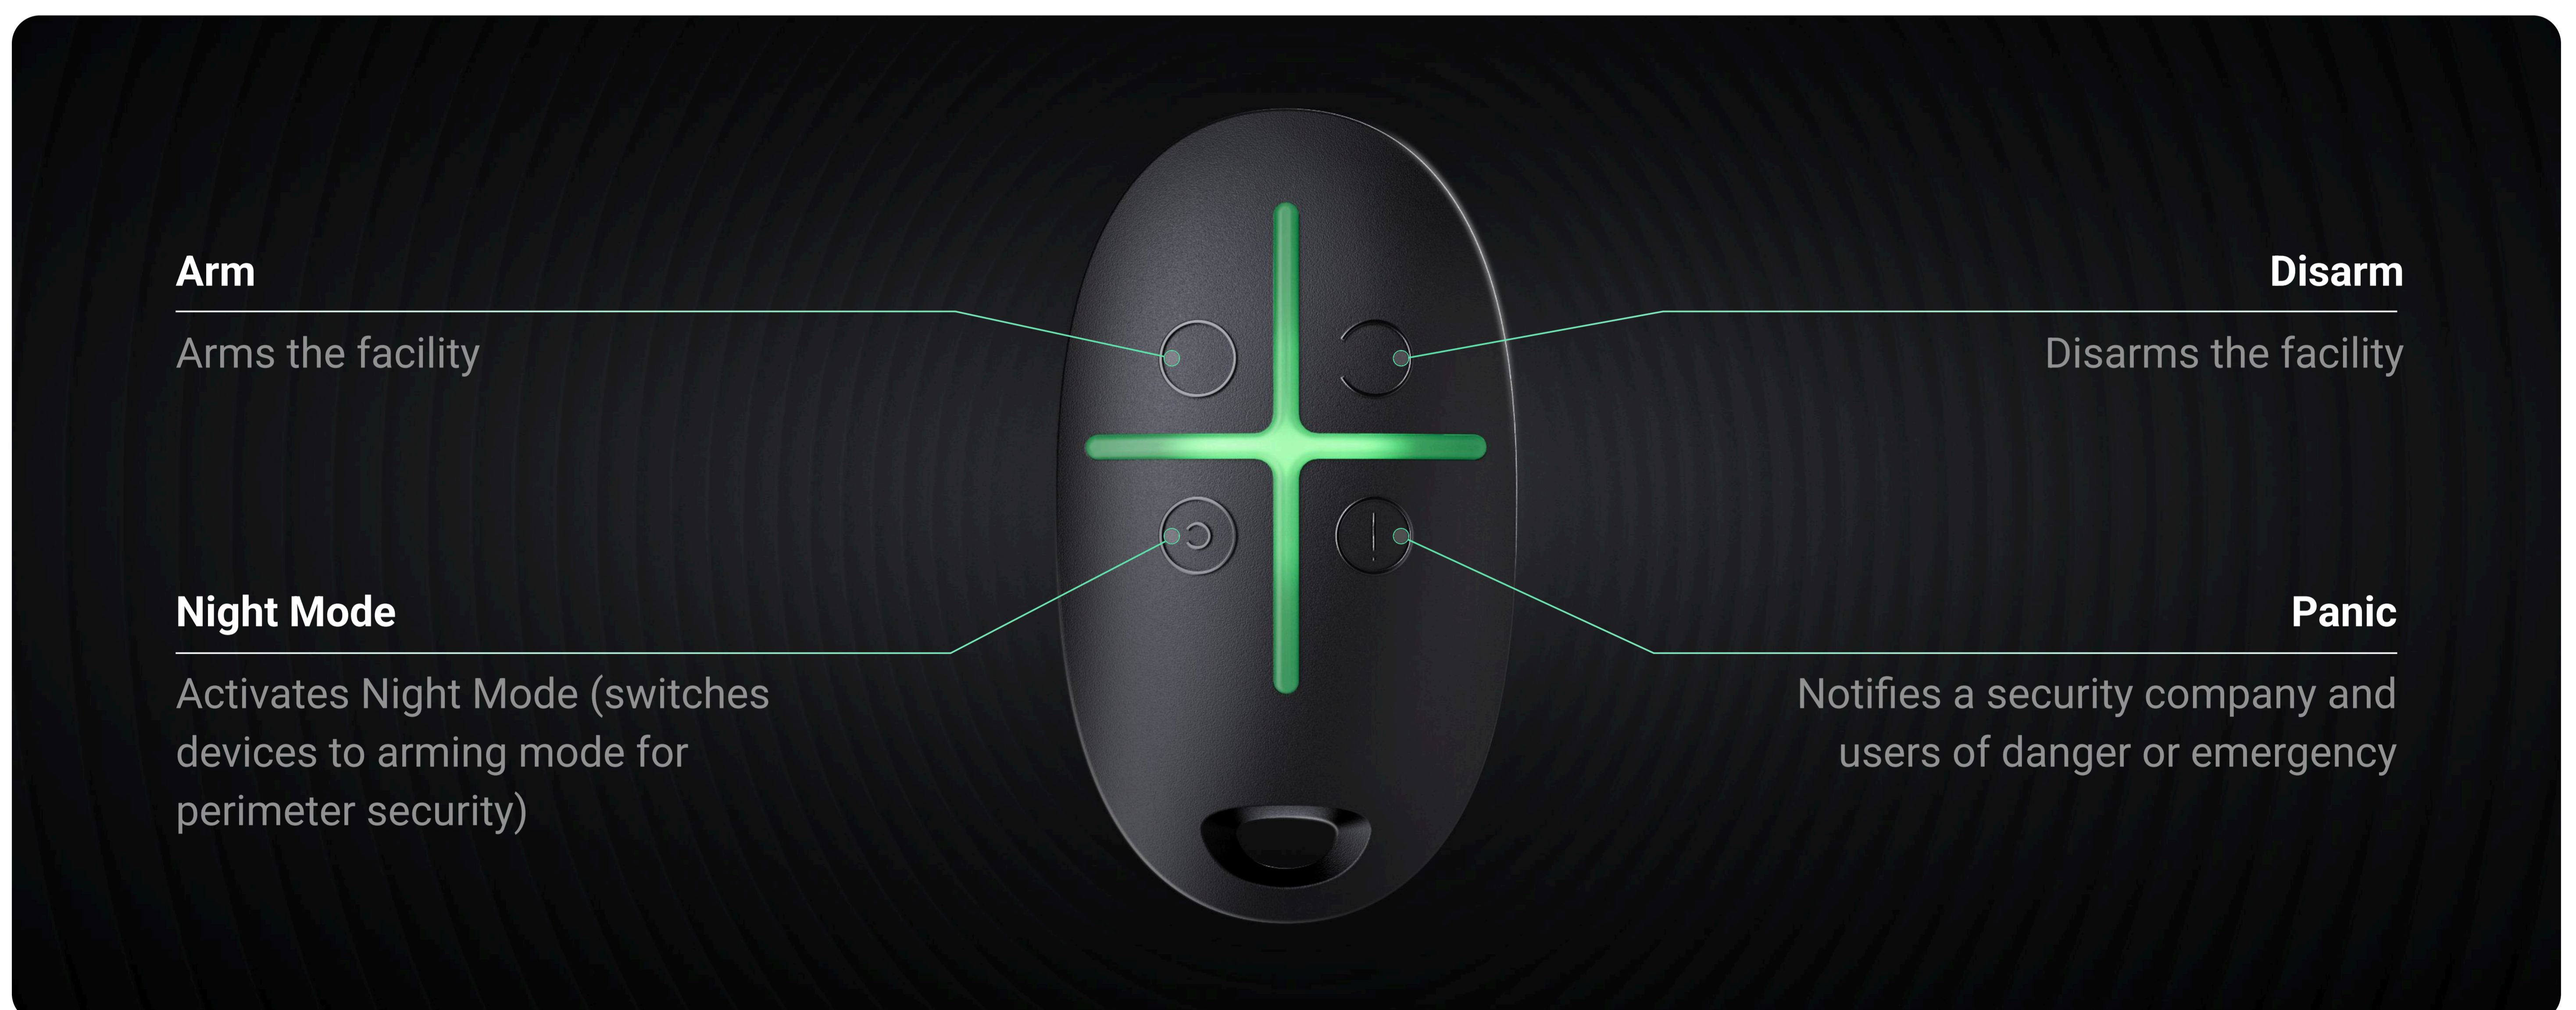


Protection against accidental activation: double or long press



Jeweller communication technology

- Up to 1,300 m (4,250 ft) of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- LED indication of button pressing



Flawless autonomy

- Up to 5 years of autonomous operation
- Pre-installed replaceable battery
- Notifications of low battery charge

Compliance

EN 50131 (Grade 2)
PD 6662:2017
NFA2P
SIA CP-01

Compatibility

Hubs
Hub Plus Jeweller
Hub 2 (2G) Jeweller
Hub 2 (4G) Jeweller
Hub 2 Plus Jeweller
Hub Hybrid (2G)
Hub Hybrid (4G)

Range extenders
ReX, ReX 2

Communication with a hub

Jeweller communication
technology

Frequency bands
866.0-866.5 MHz
868.0-868.6 MHz
868.7-869.2 MHz
905.0-926.5 MHz
915.85-926.5 MHz
921.0-922.0 MHz

Depends on the region of sales.

Jeweller communication range
up to 1,300 m
up to 4,250 ft
In an open space.

Power supply

Battery
1 × CR2032
Pre-installed.

Battery life
up to 5 years

Installation

Operating temperature range
from -10 °C to +40 °C
from 14 °F to 104 °F

Operating humidity
up to 95%

Protection class
IP32

Enclosure

Color
Black
White

Dimensions
65 × 37 × 10 mm
2,56" × 1,46" × 0,39"

Weight
13g
0,46 oz

Complete set

Ajax SpaceControl S Jeweller
1 × CR2032 battery
(pre-installed)
Quick start guide