

UniFi UISP Branding

Search UniFi products

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech New I


Door Access > Intercom

Datasheet

In The Box

Marketing Images

Installation Guide

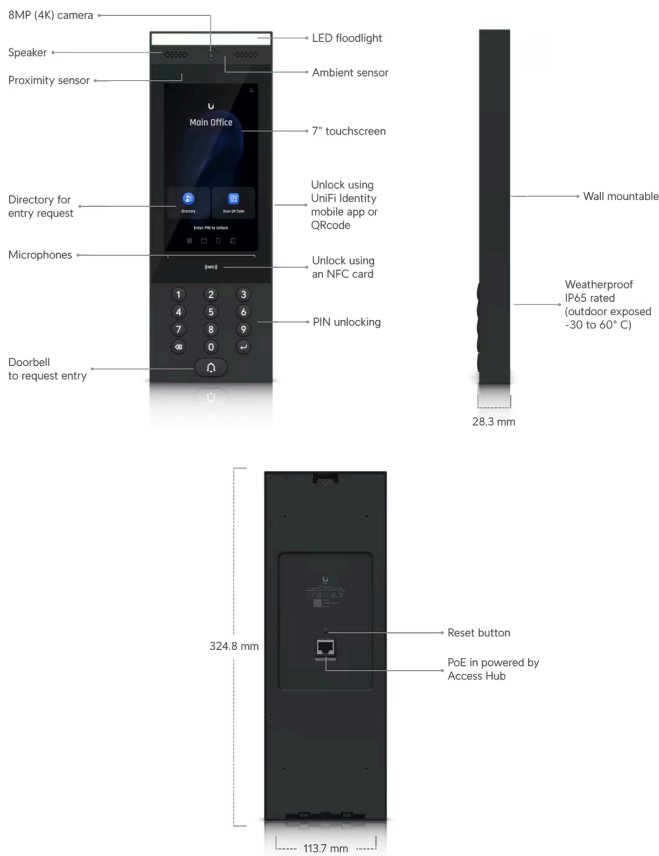

### Mechanical

#### Dimensions

324.8 x 113.7 x 28.3 mm (12.8 x 4.5 x 1.1")

#### Weight

Device: 965 g (2.1 lb)  
Bracket: 445 g (1 lb)

#### Enclosure material

Aluminum alloy, UV-stabilized polycarbonate, glass

#### Mount material

Powder-coated stainless steel

**Mounting** Wall mount, adapter to the gooseneck pedestal (Included)  
Surface angle mount, flush mount (Optional)  
Sunshield kit (Optional)

**Weatherproofing** IP65

---

## Hardware

**Networking interface** (1) GbE RJ45 port

**Connectivity** Bluetooth 4.2  
NFC

**Power method** PoE  
UL 294 Power-limited Class 2 PSU  
UL 60950-1/62368-1 LPS/PS2 PSU

**Supported voltage range** 48V DC

**Max. power consumption** 13W

**ESD/EMP protection** Air:  $\pm 15\text{kV}$ , contact:  $\pm 8\text{kV}$

**Sensors** Proximity sensor  
ALS sensor

**Camera** 3264 x 2448, 8 MP  
H: 79.4°, V: 97.5°, D: 118.2°

**Display** 177 mm (7") diagonal

**Resolution** 1024 x 600 (16:9)

**Display luminance** Max. 1000 nits (typical)

**Touch screen technology** Capacitive multi-touch

**Microphone** Yes

**Speaker** (1) 4 ohm, 2W

**LEDs** (1) LCM low temperature indicator: orange (LCM turned off when it's below  $-25^\circ\text{C}$  but the system functions normally)  
(1) LED floodlight  
(13) Keypad LED backlight

**Button** (1) Factory-reset

**NFC frequency** 13.56 MHz

**NFC read range** < 30 mm

**NFC standards** ISO 14443A, 14443B, 15693

<b>NFC technology</b>	NFC Tag 1,2,3,4,5 MIFARE Classic MIFARE Plus MIFARE Ultralight MIFARE DESFire
<b>Ambient operating temperature</b>	Device: -30 to 60° C (-22 to 140° F) Display:* -25 to 60° C (-13 to 140° F) *The display will turn off when the ambient temperature is above/below the display operation temperature, but other functions will remain functional. (Effective after firmware v 1.0.66)
<b>Operating environment</b>	Outdoor use
<b>Ambient operating humidity</b>	5 to 90% noncondensing
<b>Software information</b>	The software version of a product can be checked at <a href="https://unifi.ui.com">https://unifi.ui.com</a>
<b>UL 294 level</b>	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
<b>UL 294 statement</b>	Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.
<b>PoE cabling requirements</b>	Cable 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site. The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 mm <sup>2</sup> ) for patch cords; 24 AWG (0.21 mm <sup>2</sup> ) for horizontal or riser cable.
<b>CAN/ULC-60839-11-1 Grade</b>	Grade assignment: I
<b>Certifications</b>	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
<b>Document number, and issue date and/or revision level</b>	UA-Intercom, V01

---

## Software

<b>Management application</b>	UniFi Access: Version 1.22.17 and later
-------------------------------	---

### Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.